



DALOT 200X100

COUPE TRANSVERSALE

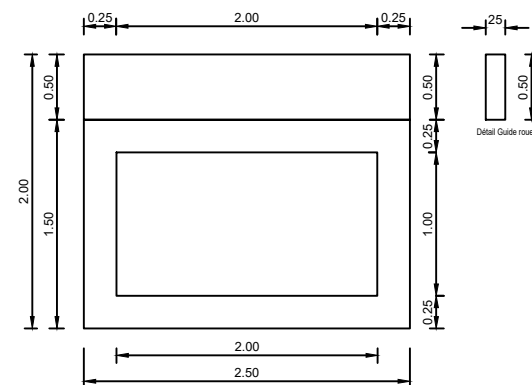

Principe de ferrailage

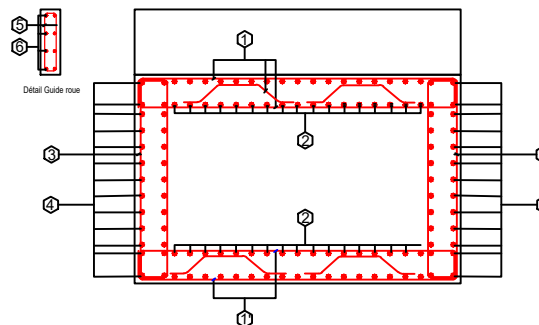

POSITION	Ø mm	NOMBRE PIECES	LONGUEUR m	ESPACEMENT cm	FACONNAGE L = cm	LONGUEUR TOTALE m	POIDS kg/m	POIDS kg	OBSERVATIONS
1	14	24	1.38	12.5	19 100 19	69.00	1.209	83.42	Tablier Element façonné sur 1ml
2	10	14	2.82	15	19 244 19	45.12	0.617	27.84	
1'	10	18	1.38	12.5	19 100 19	69.00	1.209	83.42	Radier Element façonné sur 1ml
2'	12	10	2.82	15	19 244 19	45.12	0.395	17.82	
3	10	4	3.84	12.5	19 19 154 154 19 19	69.12	0.888	61.38	Piédroits Element façonné sur 1ml
4	8	4	1.38	15	19 100 19	44.16	0.617	27.25	
5	10	15	1.95	20	14 14 69 69 14 15	50.70	0.617	31.28	Guides roues Element façonné sur 1ml
6	8	10	2.82	20	19 2.44 19	45.12	0.395	17.82	



KIEMA Pulchérie Tégawendé

Master 2
Génie civil / ROA

**Travaux d'aménagement de la gare
routière OUAGARINTER**

Dossier technique d'exécution

DALOT 200cmX100cm

Date:
01/06/2019